

# FLOW SIGHT GLASS GAUGE

## T SERIES – Thread Connection With Spring Paddle

The flow sight glass was designed with spring paddle for easy observation of flowing fluid from any direction.

### Technical Data

- Service:**
- Compatible gas and liquid
  - Water treatment system
  - Industrial flow system
  - Double window indication

**Material:** Body–SS316; Paddle–SS316; Spring–SS316  
Guge–Tempered glass; Gasket–Teflon, Gore Tex, Graphite


**Max working temperature:** 150°C (Teflon), 300°C (Gore-Tex)

**Max working pressure:** TA type-10 kg/cm<sup>2</sup> at 25°C water

TB type-15 kg/cm<sup>2</sup> at 25°C water


### Dimension

#### (A) TA Type

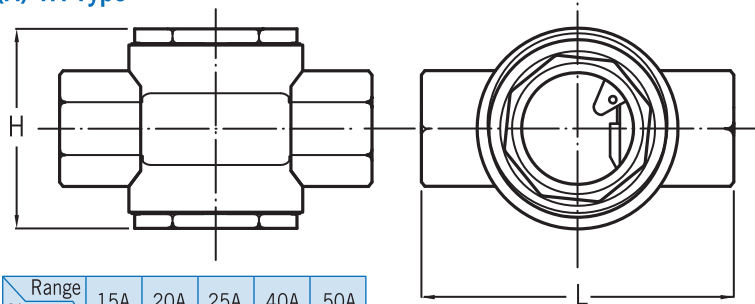

Range Size	15A	20A	25A	40A	50A
L	114	114	114	130	150
H	72	72	72	120	136

#### (B) TB Type

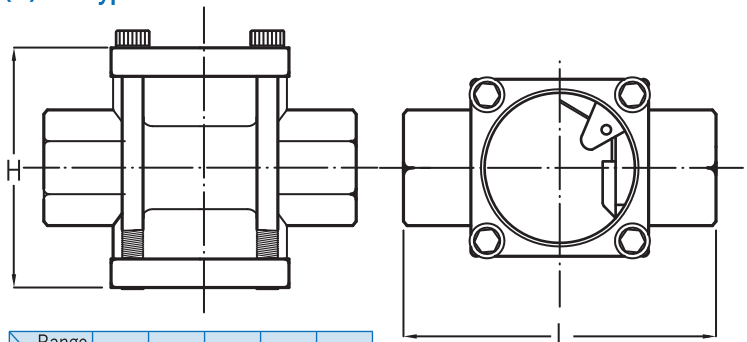

Range Size	15A	20A	25A	40A	50A
L	114	114	114	130	150
H	72	72	72	115	129

unit=mm




TA TYPE



TB TYPE

### Mounting Position

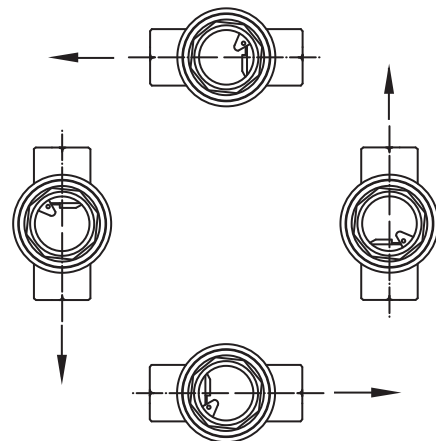

### Ordering Information

TA/TB	Code	Model
↓	S	Wetted parts are SS316
	↓	<b>Code</b> <b>Size</b>
		(1) 15A (2) 20A (3) 25A (4) 40A (5) 50A
	↓	<b>Code</b> <b>Connection Thread</b>
		(1) NPT (2) PF (3) Option
↓	<b>Code</b> <b>Gasket Material</b>	
	(1) Teflon (2) Gore-Tex (3) Graphite	
↓		<b>Complete Ordering Code</b>