

# THREAD TYPE DIAPHRAGM SEAL

## DT104

DT-104 diaphragm seal is designed to be used in highly viscous process industries. It is easy to assemble with pressure gauges, pressure switches, and pressure instruments.

### Technical Data

**Instrument connection:** female thread ¼" to ½" BSP or NPT

**Process connection:** 1" to 2" NPT male thread

**Temperature limited:** -40~+150°C

**Pressure range limited:** (for pressure gauge)

Size	1"	1½"	2"
MINIMUM LIMITED (kg/cm <sup>2</sup> )	0~10	0~4	0~1.6
MAXIMUM LIMITED (kg/cm <sup>2</sup> )	0~60	0~40	0~16

**Material:** body-SS316(standard)

Option: SS316L, Hastelloy C276, and others on request


**Membrane:** SS316L(standard)

Option: Hastelloy C276, tantalum and others on request

### Dimensions

Item	Description of Parts
a	Body housing
b	Filling port
c	Membrane
d	Instrument connection

**NOTE**  
Performance Technical Data are effective with date of issue and are subject to change without prior notice.

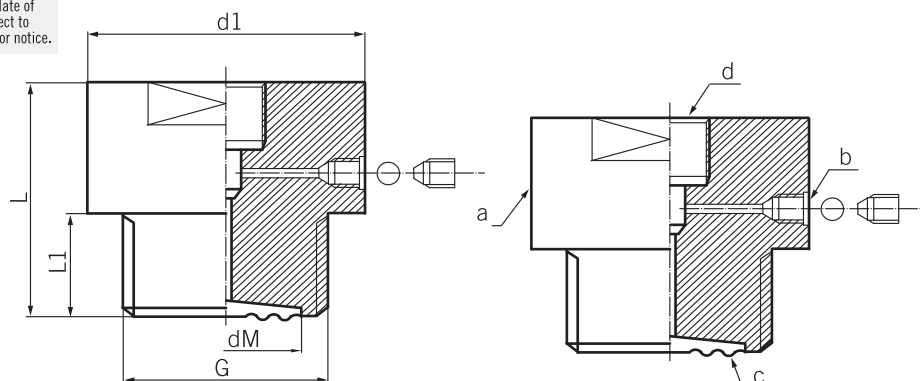

unit=mm

### Dimensional Data

G	1"NPT	1½"NPT	2"NPT
dM	23	32	38
L	65	65	65
L1	28	30	30
d1	30	44	56

### Ordering Information

DT104	Code	Instrument Connection (Female)
		(A) ¼"BSP (B) ¼"NPT (C) ⅜"BSP (D) ⅜"NPT (E) ½"BSP (F) ½"NPT
		<b>Code</b> <b>Process connection (Male)</b>
		(1) 1"NPT (2) 1½"NPT (3) 2"NPT
		<b>Code</b> <b>Body material</b>
		(S) SS316 (standard) (O) Option
		<b>Code</b> <b>Membrane material</b>
		(1) SS316L (2) Hastelloy C276 (3) Tantalum (4) Option
DT104		Complete ordering code

