



## Thermowell OG1, OG2, OG3

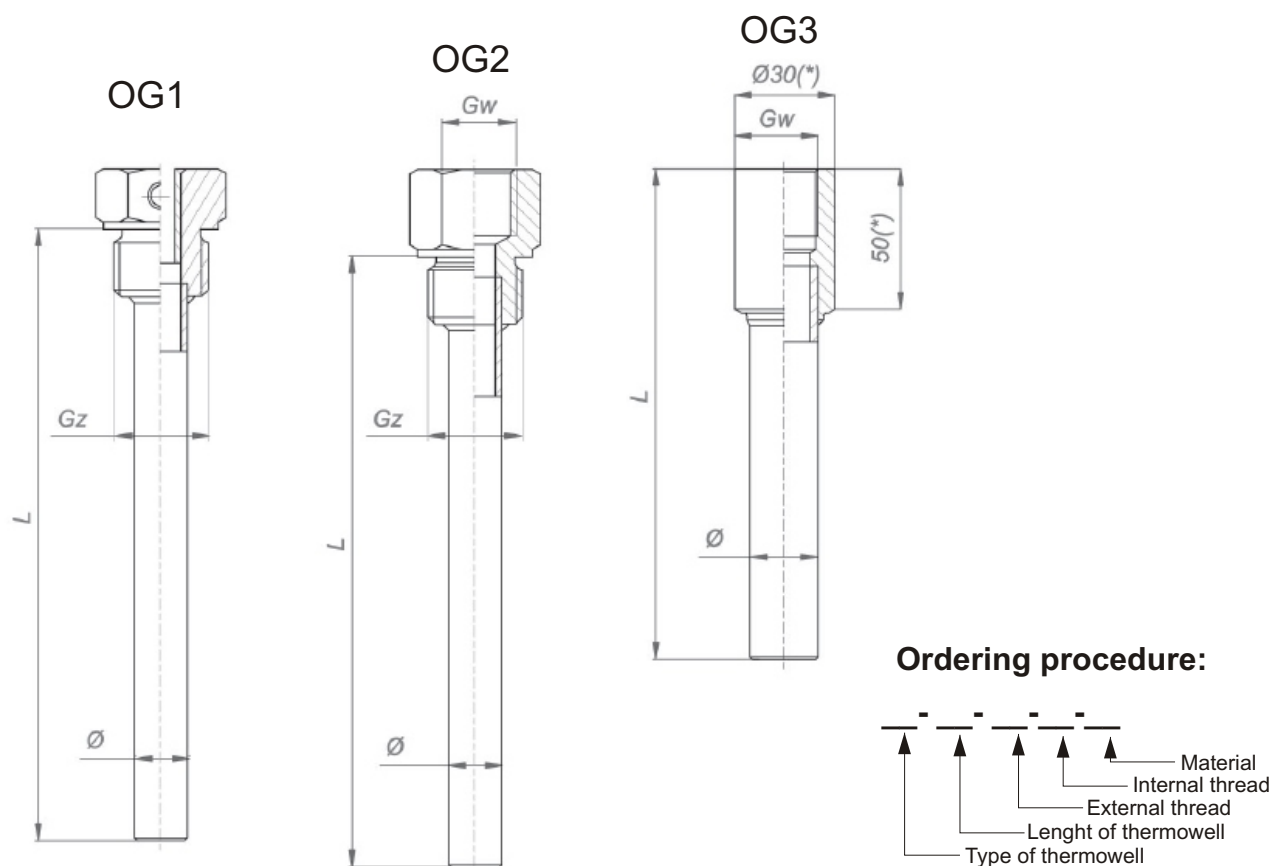


| Material | Diameter Ø [mm] | External thread | Internal thread | Length L[mm] |
|----------|-----------------|-----------------|-----------------|--------------|
| 10H2M    | 12x1.5          | M20x1.5         | M20x1.5         | 50....1000   |
| 15HM     | 15x1.5          | G1/2"           | G1/2"           |              |
| 1.4301   | 15x2            | ½"NPT           | ½"NPT           |              |
|          | 16x2            |                 |                 |              |


### ADMISSIBLE LOADS FOR PARTICULAR TYPES OF SHIELDS AT SPECIFIED WORKING CONDITIONS

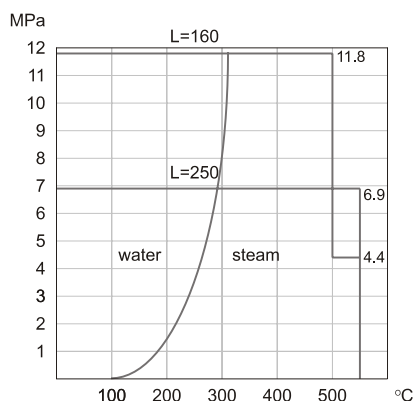

**Graph 1.** Admissible load of the G1 and T1 shields at the conditions of work - 15 HM, 1H18N9T, H17N13M2T

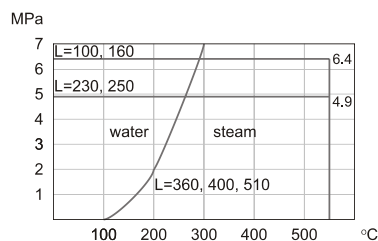

**Graph 2.** Admissible load of the GN1 and GB1 shields at the conditions of work - 15 HM, 1H18N9T, H17N13M2T

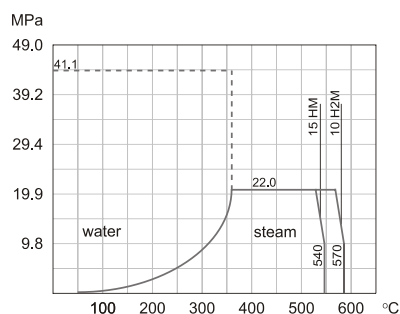

**Graph 3.** Admissible load of the SW1 and SW2 shields at the conditions of work