

PS2200W

PRESSURE SWITCH NEMA 4, 4X, IP65

PS2200W

Proof Pressure to 1000psi
Adjustable Ranges: 0.05~9.8psi
Temperature: -20 to 205°C

The New-Flow PS2200W, a water proof pressure switch, is designed to be used in control systems. PS2200W has high set point repeatability and narrow dead band features. There is a variety of range selections available upon request. Easily adjusted to the set point, no special tools needed!

Technical Data

Switch Data: one SPDT & two SPDT Microswitch, 15amps 125/250V, Gold Contact Microswitch 1A 125/250VAC

Housing: die cast aluminum alloy with paint

Conduit Connection: ¾" or ½" NPT Female


Pressure Element: welded type diaphragm

Process Materials: wetted parts are all in SS316

Process Connection: ½" or ¼" NPT male



Dimensions

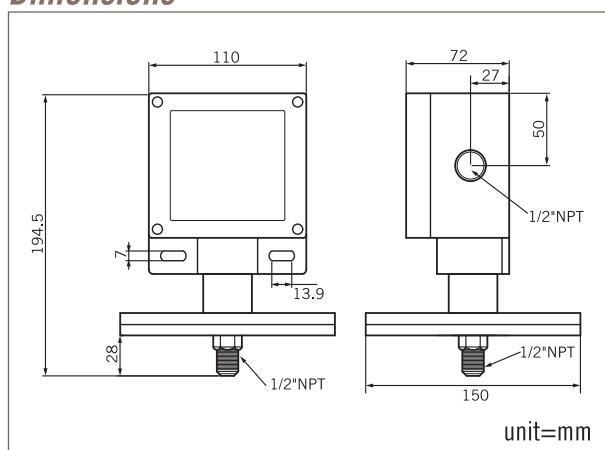

unit=mm

Range Selection Table

Code	Adjustable Range	Dead Band	Maximum Pressure Proof
04R	0.05~1.8 psi	0.015~0.3	1000psi
10R	0.4~2.8 psi	0.2~0.5	1000psi
20R	0.4~5.0 psi	0.3~0.6	1000psi
30R	1.6~9.8 psi	0.3~0.8	1000psi

Ordering Information

PS2200W	Code	Range							
<div></div>		04R	0.05~1.8psi	10R	0.4~2.8psi	20R	0.4~5.0psi	30R	1.6~9.8psi
		Code	Wetted Material						
		A	SS316						
			Code	Process Connection					
				(1) ½" NPT male (2) ¼" NPT male					
				Code	Conduit Connection				
					(E) ¾" NPT Female (F) ½" NPT Female, standard				
					Code	Switch Form			
					1	One SPDT			
					2	Two SPDT (one setting point)			
				3	Gold Contact (SPDT)				
PS2200W									Complete Ordering Code