

PLASTIC RELIEF VALVES RV-10

Technical Data

Low lift relief valves

Material: Body-P.V.C, P.P, PVDF; Diaphragm membrane-Viton

CV: 0.7

Inlet pressure: maximum 1.4Mpa (203psi)

Adjustable range: 0.03~1.0 Mpa (5~150psi)

Working temp.: 60°C

Working fluid: Water corrosive liquid


Panel mounting available



Range Table

Code	Range
5R	5~25 PSI
26R	26~80 PSI
81R	81~150 PSI

Dimensions

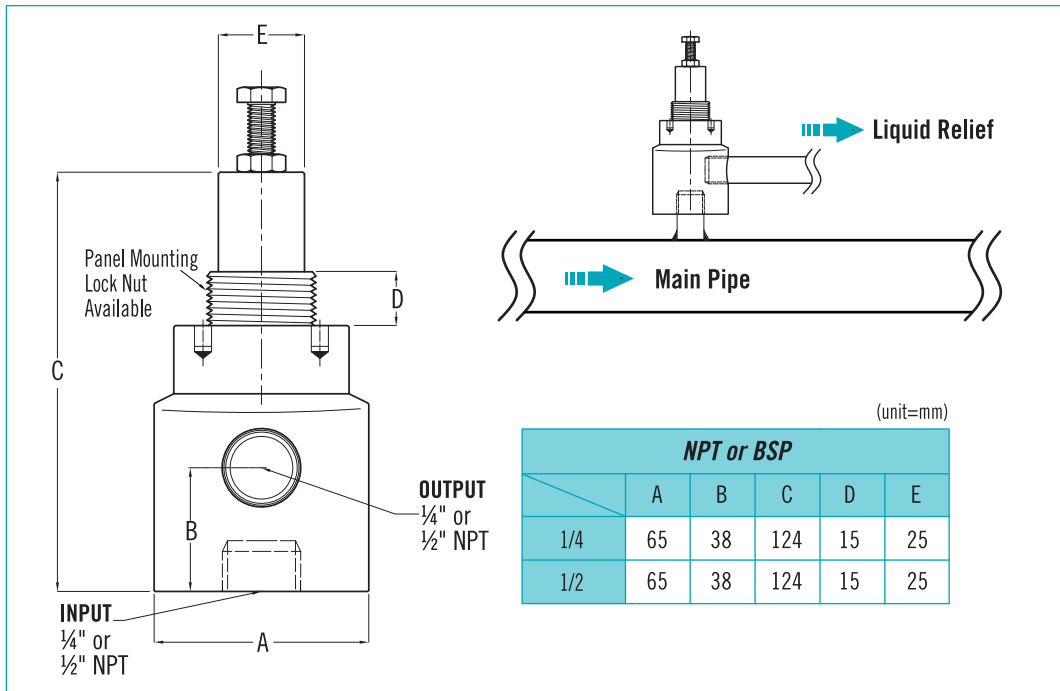

WWW NEW-FLOW COM • TEL: 886-7-8135500 • FAX: 886-7-8225588 • Email: info@new-flow.com

Ordering Information

RV-10	Code	Material
		(1) P.V.C (2) P.P (3) PVDF
		Code Pressure Range
	05R	5~25 PSI 26R 26~80 PSI 81R 81~150 PSI
		Code Size
		(A) 1/4"NPT (B) 1/2"NPT (C) 1/4"BSP (D) 1/2"BSP
		Code Panel Mounting Lock Nut
	W	With N Without
RV-10		Complete Ordering Code