

Power supply ZL-25-01

- ✓ **Output power supply 2x24 V DC**
- ✓ **Maximum output current 2 × 50 mA**
- ✓ **Indication of presence of output voltage**
- ✓ **Permanently resistant to short circuits and excess voltage**
- ✓ **Casing can be fitted on a standard rail (TS35, TS32)**



Applications and functions


The ZL-24-01 power supply is used with a 220 V, 50 Hz AC network supply to power devices requiring direct current (output voltage in the range 5 ÷ 30 V, standard value 24 V).

The product is available with two voltage DC output 2x24 V DC (2x50mA). To increase output current both channels should be parallel connected.

The ZL-25-01 is typically used to power devices requiring a 24 V DC power supply.

Technical parameters

Input voltage	230 V, 50 Hz (±10%)
Output voltage	2x24 V DC (special versions: 5 ÷ 30 V)
Maximum load current	2 × 50 mA (current limitation 70 mA per circuit)
Galvanic separation	network transformer
Strength test parameters	1.5 kV AC, 50 Hz, 1 min
Ambient temperature	5...60°C
Casing	Z106 (KRADEX)
Ingress protection rating	IP 20
Weight	0.4 kg

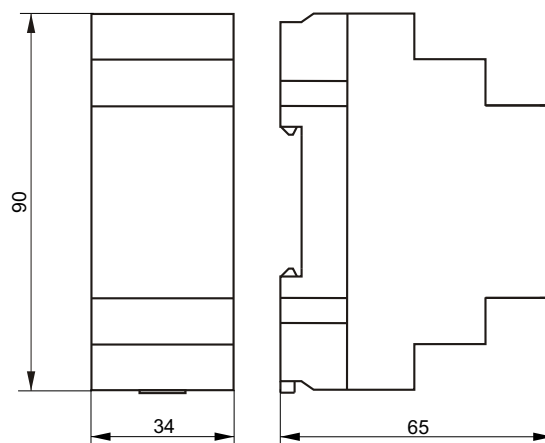

Ordering procedure

Standard version: **ZL-25-01**

Special version: **ZL-....-01**

Output voltage (value from 5 to 30 V)

Electrical diagrams

